


DSD Cover and Device Sub-Assemblies

Cl. I, Div. 1&2, Groups B*,C,D ◆ Explosionproof
 Cl. II, Div. 1, Groups E,F,G Dust-Ignitionproof
 Cl. II, Div. 2, Groups F,G Raintight
 Cl. III Wet Locations
 NEMA 3,7B*CD,9EFG

4C

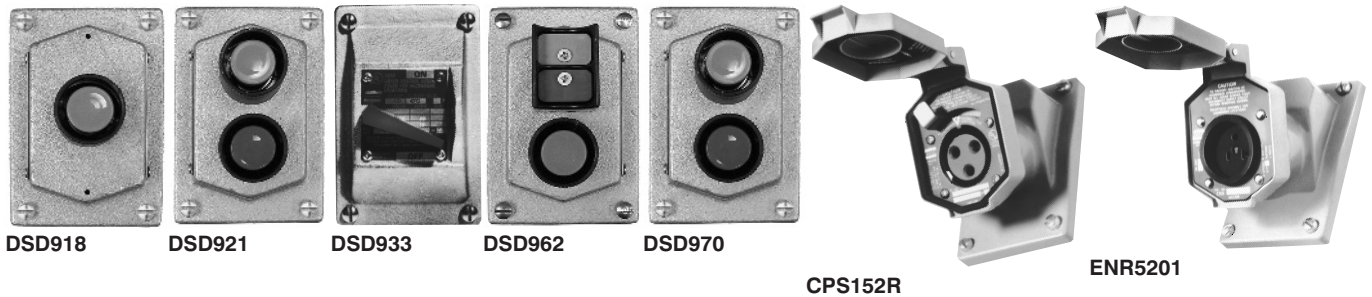

For use with EDSCM modular control device bodies listed on catalog page 392 & EFS/EDS back boxes listed on catalog page 397.

Front Operated Pushbutton Stations 600 VAC Heavy Duty, Factory Sealed

Number of Cover Buttons	Normal Position	Diagram	Cat. #§
1	1 Circuit Universal		DSD918
1	2 Circuits Universal		DSD919
	2 Circuits**		DSD920**
2	2 Circuits Universal		DSD921
2	2 Circuits** Start-Stop unless otherwise specified		DSD922**
2	2 Circuits Universal Mushroom Head		DSD970
3	3 Circuits Universal		DSD962

Front Operated General Use Snap Switch

Style	Amperes		Cat. #
	120 VAC	277 VAC	
1-Pole	20	20	DSD933‡
2-Pole	20	20	DSD934‡
3-Pole	◆◆	◆◆	DSD935***
3-Way	20	20	DSD936‡
4-Way	20	20	DSD937‡
1-Pole	30	30	DSD939***
2-Pole	30	30	DSD940***
3-Way	30	30	DSD941***

*** Cannot be factory sealed.

◆◆ 16 Amp., 125V.
10 Amp., 250V.

** Two universal contact blocks, must be wired as two circuits with one normally open and one normally closed.

‡ To order a comparable factory sealed cover for EDS, EDSC, EDSCM21 and the bottom gang of EDSCM33 and EDSCM63 bodies, add suffix S697.

* See note on catalog page 394 for Division 1, Group B applications.

Delayed Action Receptacles Factory Sealed

Rating	Cat. #
20 A, 1 HP, 125-250 VAC 60 Hertz 20 A, 18 VDC	CPS152R (2 wire, 3 pole)
30 A, 1½ HP, 125-250 VAC 60 Hertz; 7 A, ½ HP, 480 VAC, 60 Hertz	CPS532R (2 wire, 3 pole)
30 A, 3 HP, 125-250 VAC 60 Hertz; 7A, 1 HP, 480 VAC, 60 Hertz	CPS732R (3 wire, 4 pole)

General Purpose, Dead Front, Factory Sealed


Rating	Cat. #	NEMA Config.
20 A, 125 VAC	ENR5201	
20 A, 250 VAC	ENR6202	

◆ When a CPS receptacle cover device is used, the assembly meets requirements for Class I, Groups C and D areas only.

§ Specify marking required for external pushbuttons or nylon rocker handles. Standard markings available, are as follows:

START	OFF	RESET	LIGHT ON
STOP	RUN	TRIP	HAND
ON	JOG	TEST	AUTOMATIC
EMERGENCY	OPEN	DOWN	RAISE
FORWARD	CLOSE	IN	LOWER
REVERSE	UP	OUT	

4C Control Stations



DSD951




DSD925



DSD947-J1-J1



DSD958



DSD957



DSD961-J1

4C Control Stations

For use with EDSCM modular control device bodies listed on catalog page 392 & EFS/EDS back boxes listed on catalog page 397.

Side Operated Pushbutton Station
600 VAC Heavy Duty, Factory Sealed

Normal Position	Diagram	Cat. # §
1 Circuit Universal		DSD949
2 Circuits Universal		DSD950
2 Circuits 1 Open - A 1 Closed - B Start-Stop unless otherwise specified		DSD951

Selector Switches
Maintained Contact 600 VAC Heavy Duty

Style	Position 1	Position 2	Position 3	Cat. # ††
Two Circuit	A1 A2			DSD923
Two Position	A1 A2			DSD924
Four Circuit	B1 B2			
Two Circuit	A1 A2			DSD925
Three Position	A1 A2 B1 B2			DSD926
Four Circuit	A1 A2 B1 B2			DSD927

Pilot Light Devices ♦
Factory Sealed

Description	Diagram	Cat. #
With one pilot light		DSD948-J†
With two pilot lights (Not available with a transformer)		DSD947-J†-J†
With one pilot light and transformer		DSD948-J†-T**
With one pilot light and pushbutton station		DSD958-J†
With one pilot light and 2 pushbutton station		DSD961-J†
With one pilot light & transformer and 2 pushbutton station		DSD961-J†-T**

Blank Cover

Cat. # DSD957

§ See table on page 395.
†† Specify indicating plate markings.
Standard indicating plate markings available are as follows:

Two-Position		
RUN, JOG HAND, AUTOMATIC FORWARD, REVERSE	FAST, SLOW OPEN, CLOSE UP, DOWN ON, OFF	IN, OUT RAISE, LOWER START, STOP
Three-Position		
JOG, OFF, RUN AUTOMATIC, OFF, HAND FORWARD, OFF, REVERSE FAST, OFF, SLOW	1, OFF, 2 OPEN, OFF, CLOSE UP, OFF, DOWN	

† Add color symbol for each pilot light from table below.

Color	Symbol	Color	Symbol	Color	Symbol
Red	J1	Amber	J6	Blue	J11
Green	J3	Clear	J10		

** Add suffix below for transformer primary voltage:
Transformers – Voltages above 125

Nom. Volts 50-60 hertz Transformer	Primary Voltage Range	Suffix Added to Cat. #
220/110	220-240	T2
440/110	440-480	T4
550/110	550-600	T5

♦ LED pilot lights can be furnished in place of standard incandescent pilot lamps. Add suffix LED to Cat. No. after last color symbol.

* See note on catalog page 394 for Division 1, Group B applications.