

## Application:

- STL thread lubricant is used between any screw thread and its tapped opening, on any rotating shaft – threaded or plain, and to inhibit corrosion on any metal-to-metal joint of apparatus and appliance enclosures.
- HTL high temperature lubricant is used on lighting fixture threaded joints and on threaded joints of the enclosures of any heat-producing apparatus or appliance.

## Features:


STL thread lubricant is lithium based, anti-galling and:

- is especially effective between parts made of dissimilar metals
- is effective and stable from -20°F to +300°F
- maintains grounding continuity; should not be used on exposed current-carrying parts
- has excellent adhesion qualities

A liberal application on threaded joints maintains raintightness and inhibits corrosion.

HTL is a high temperature, anti-seize, conductive thread lubricant:

- effective and stable from -70°F to +1800°F
- prevents seizure, galling, rust, galvanic action
- maintains grounding continuity; should not be used on exposed current-carrying parts
- effective between parts made of dissimilar metals

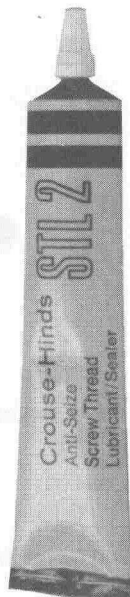

### STL Thread Lubricant

**Net  
Wt.**  
1 3/4 oz. (tube)  
8 oz. (can)

**Cat. #**  
STL2  
STL8



### HTL High Temperature Thread Lubricant

**Net  
Wt.**  
4 oz. (tube)

**Cat. #**  
HTL4