


## Pipe Straps, Conduit Clamps and Hangers

### 701 — Superstrut® Straps for O.D. Tubing (continued)

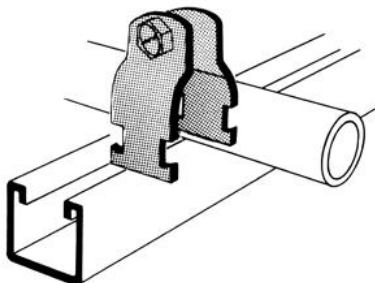

| CAT. NO.  | TUBING O.D. (IN.) | STEEL STRAP THICKNESS | DESIGN LOAD (LBS.) | STD. CTN. |
|-----------|-------------------|-----------------------|--------------------|-----------|
| 701-2-3/4 | 2¾                | 12 ga.                | 1,300              | 25        |
| 701-2-7/8 | 2⅞                | 12 ga.                | 1,300              | 25        |
| 701-3     | 3                 | 12 ga.                | 1,300              | 25        |
| 701-3-1/8 | 3⅛                | 12 ga.                | 1,300              | 25        |
| 701-3-1/4 | 3¼                | 12 ga.                | 1,300              | 25        |
| 701-3-3/8 | 3⅜                | 12 ga.                | 1,300              | 25        |
| 701-3-1/2 | 3½                | 12 ga.                | 1,300              | 25        |
| 701-3-5/8 | 3⅝                | 11 ga.                | 1,650              | 25        |
| 701-3-3/4 | 3¾                | 11 ga.                | 1,650              | 25        |
| 701-3-7/8 | 3⅞                | 11 ga.                | 1,650              | 25        |
| 701-4     | 4                 | 11 ga.                | 1,650              | 25        |
| 701-4-1/8 | 4⅛                | 11 ga.                | 1,650              | 25        |
| 701-4-1/4 | 4¼                | 11 ga.                | 1,650              | 25        |
| 701-4-3/8 | 4⅜                | 11 ga.                | 1,650              | 25        |
| 701-4-1/2 | 4½                | 11 ga.                | 1,650              | 10        |
| 701-4-5/8 | 4⅝                | 11 ga.                | 1,650              | 10        |
| 701-4-3/4 | 4¾                | 11 ga.                | 1,650              | 10        |
| 701-4-7/8 | 4⅞                | 11 ga.                | 1,650              | 10        |
| 701-5     | 5                 | 11 ga.                | 1,650              | 25        |
| 701-5-1/8 | 5⅛                | 11 ga.                | 1,650              | 10        |
| 701-5-1/4 | 5¼                | 11 ga.                | 1,650              | 10        |
| 701-5-3/8 | 5⅜                | 11 ga.                | 1,650              | 10        |
| 701-5-1/2 | 5½                | 11 ga.                | 1,650              | 10        |
| 701-5-5/8 | 5⅝                | 10 ga.                | 1,650              | 10        |
| 701-5-3/4 | 5¾                | 10 ga.                | 1,650              | 10        |
| 701-5-7/8 | 5⅞                | 10 ga.                | 1,650              | 10        |
| 701-6     | 6                 | 10 ga.                | 1,650              | 10        |
| 701-6-1/8 | 6⅛                | 10 ga.                | 1,650              | 10        |
| 701-6-1/4 | 6¼                | 10 ga.                | 1,650              | 10        |
| 701-6-3/8 | 6⅜                | 10 ga.                | 1,650              | 10        |
| 701-6-1/2 | 6½                | 10 ga.                | 1,650              | 10        |
| 701-6-5/8 | 6⅝                | 10 ga.                | 1,650              | 10        |
| 701-6-3/4 | 6¾                | 10 ga.                | 1,650              | 10        |
| 701-6-7/8 | 6⅞                | 10 ga.                | 1,650              | 10        |
| 701-8     | 8                 | 10 ga.                | 1,650              | 10        |


### 702 — Superstrut® Straps for Rigid Conduit, IMC and Pipe

- For Rigid or IMC Conduit, Pipe and Electric Metal Tubing (EMT)

| CAT. NO.  | RIGID CONDUIT OR PIPE SIZE (IN.) | O.D. SIZE (IN.) | STEEL STRAP THICKNESS | DESIGN LOAD (LBS.) | STD. CTN. |
|-----------|----------------------------------|-----------------|-----------------------|--------------------|-----------|
| 702-3/8   | ¾                                | .675            | 14 ga.                | 750                | 100       |
| 702-1/2   | ½                                | .840            | 14 ga.                | 750                | 100       |
| 702-3/4   | ¾                                | 1.050           | 14 ga.                | 750                | 100       |
| 702-1     | 1                                | 1.315           | 14 ga.                | 750                | 100       |
| 702-1-1/4 | 1¼                               | 1.660           | 14 ga.                | 800                | 50        |
| 702-1-1/2 | 1½                               | 1.900           | 12 ga.                | 800                | 50        |
| 702-2-STR | 2                                | 2.375           | 12 ga.                | 800                | 50        |
| 702-2-1/2 | 2½                               | 2.875           | 12 ga.                | 1,000              | 50        |
| 702-3     | 3                                | 3.500           | 12 ga.                | 1,650              | 50        |
| 702-3-1/2 | 3½                               | 4.000           | 11 ga.                | 1,650              | 25        |
| 702-4     | 4                                | 4.500           | 11 ga.                | 1,650              | 25        |
| 702-4-1/2 | 4½                               | 5.000           | 11 ga.                | 1,650              | 25        |
| 702-5     | 5                                | 5.563           | 11 ga.                | 1,650              | 25        |
| 702-6     | 6                                | 6.625           | 11 ga.                | 1,650              | 10        |
| 702-8     | 8                                | 8.625           | 11 ga.                | 1,650              | 10        |
| 702-10    | 10                               | 10.750          | 10 ga.                | 1,650              | 25        |
| 702-12    | 12                               | 12.750          | 10 ga.                | 1,650              | 25        |

Standard Finish — GoldGalv® brand. For Electro-Galvanized (Silver), add EG suffix.

### 703 — Universal Clamp



| CAT. NO.  | PIPE O.D. (IN.) | STEEL STRAP THICKNESS | DESIGN LOAD (LBS.) | STD. CTN. |
|-----------|-----------------|-----------------------|--------------------|-----------|
| 703-1/2   | .706-.840       | 16 ga.                | 400                | 100       |
| 703-3/4   | .932-1.050      | 14 ga.                | 550                | 100       |
| 703 1     | 1.163-1.315     | 14 ga.                | 550                | 100       |
| 703-1-1/4 | 1.508-1.660     | 14 ga.                | 800                | 50        |
| 703-1-1/2 | 1.738-1.900     | 14 ga.                | 800                | 50        |
| 703-2     | 2.195-2.375     | 14 ga.                | 800                | 50        |

Standard Finish — GoldGalv®